



Self Contained Ice Machine up to 56 kg

Item #:
Project:
Quantity:



FEATURES

- Front-in & front-out air flow: no need to leave space on the
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.

		CONDENSING SYSTEM	INTERNAL BIN CAPACITY				
201	NU 100 Full Cube 10 g W 22 x D 22 x H 22 mm	Air cooled	20 kg				
		REFRIGERANT GAS	OPERATING REQUIREMENTS				
		R404A		Minimum	Maximum		
	NU H 100 Half Cube 6 g W 10,5 x D 22 x H 27 mm		Air temperature	10°C	43°C		
		VOLTAGE V/Hz/ph	Water temperature	5°C	35°C		
			Water pressure	1 bar (14 psi)	5 bar (70 psi)		
		230/50/1	Electrical voltage	-10%	+10%		

Certifications:





IMPORTANT NOTICE:


NU 100 EASY





Self Contained Ice Machine up to 56 kg

Item #: Project: Quantity:

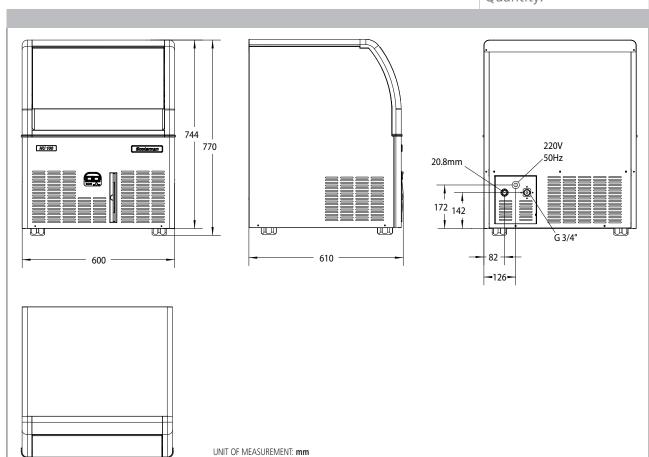

				Compressor		Circuit wires		Max. Tuse size	
UNIT DATA		Version	Voltage	Btu/h	w	No.	Ømm²	Α	
Size (W x D x H)	600 x 610 x 770 mm	NU 100 AS	230/50/1	2661	780	3	1.5	10	
Net weight	50 kg	NU H 100 AS	230/50/1	2661	780	3	1.5	10	

SHIPPING DATA

Carton (W x D x H) 670 x 680 x 910 mm

Weight 60 kg

			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NU 100 AS	Air	230/50/1	56	45	32	27.7	9.2	4.4	450
NU H 100 AS	Air	230/50/1	50	45	32	27.7	9.2	4.4	450

^(*) Data refer to 32°C Amb. / 21°C Water temperature conditions