

NU 150



Self Contained Ice Machine up to 85 kg

Item #:
Project:
Quantity:



FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.



NU 150
Full Cube 10 g
W 22 x D 22 x H 22 mm



NU H 150
Half Cube 6 g
W 10,5 x D 22 x H 27 mm

CONDENSING SYSTEM

Air cooled

INTERNAL BIN CAPACITY

20 kg

REFRIGERANT GAS

R404A

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	35°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

VOLTAGE V/Hz/ph

230/50/1

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine up to 85 kg



NU 150



Self Contained Ice Machine up to 85 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine up to 85 kg

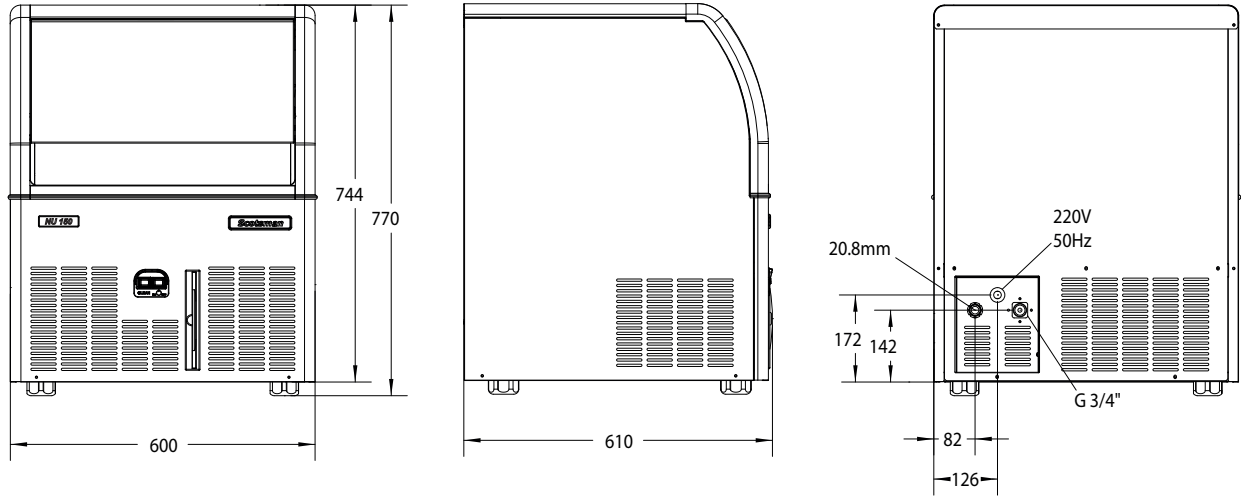

UNIT OF MEASUREMENT: mm

UNIT DATA			Compressor		Circuit wires		Max. fuse size		
			Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	600 x 610 x 770 mm		NU 150 AS	230/50/1	3378	990	3	1.5	10
Net weight	50 kg		NU H 150 AS	230/50/1	3378	990	3	1.5	10
SHIPPING DATA									
			Carton (W x D x H)	670 x 680 x 910 mm					
Weight	62 kg								
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NU 150 AS	Air	230/50/1	85	68	48	18.7	10.8	3.9	500
NU H 150 AS	Air	230/50/1	85	68	48	18.7	10.8	3.9	500

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions