

# EC 176 EASY FIT

Self Contained Ice Machine up to 85 kg

Item #:
Project:
Quantity:



## FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior. Advanced diagnostics computerized control.
- Front panel in and out airflow (air cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front ON-OFF switch. Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Vapor-based microbial control system pouch in ice storage area. Water system protected by patented anti-scale system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.



EC L 176  
Large Gourmet 39 g  
Ø 38 x H 41 mm



EC M 176  
Medium Gourmet 20 g  
Ø 30 x H 34 mm



EC S 176  
Small Gourmet 8 g  
Ø 21 x H 25 mm

## CONDENSING SYSTEM

Air cooled  
Water cooled

## INTERNAL BIN CAPACITY

41 kg

## REFRIGERANT GAS

R404A

## OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

## VOLTAGE V/Hz/ph

230/50/1

Certifications:



**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice  
Apple store  
Google play  
Windows store



[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)


Self Contained Ice Machine up to 85 kg

# EC 176 EASY FIT

Self Contained Ice Machine up to 85 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine up to 85 kg

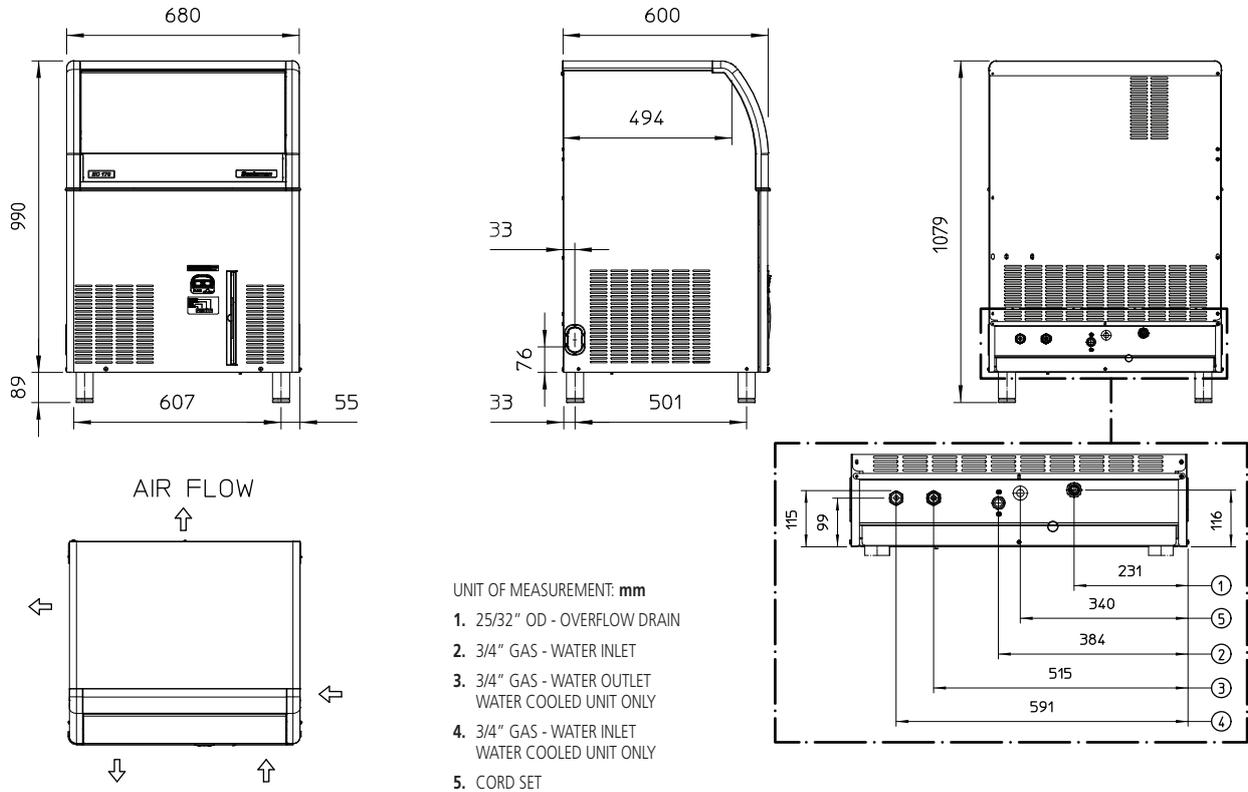

UNIT DATA			Compressor		Circuit wires		Max. fuse size				
			Version	Voltage	Btu/h	W	No.	Ømm <sup>2</sup>	A		
Size (W x D x H)	680 x 600 x 1080 mm		EC L 176 AS	230/50/1	5132	1504	3	1.5	16		
Net weight	72 kg		EC M 176 AS	230/50/1	2491	730	3	1.5	16		
SHIPPING DATA			EC M 176 WS	230/50/1	5118	1500	3	1.5	16		
			EC S 176 AS	230/50/1	5118	1500	3	1.5	16		
Carton (W x D x H)			750 x 670 x 1170 mm		24 h ice production kg °C Amb. / °C Water		Energy consumption*		Water usage*	Instant power	
Weight			82 kg		10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
Version	Condensation	Voltage	71	70	58	25.9	15.0	7.9	860		
EC L 176 AS	Air	230/50/1	85	83	65	25.7	16.7	7.1	900		
EC M 176 AS	Air	230/50/1	85	80	68	20.6	14.0	79.2	610		
EC M 176 WS	Water	230/50/1	70	69	55	29.1	16.0	9.6	900		
EC S 176 AS	Air	230/50/1									

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions