

# NU 220

EASY

**Scotsman**  
Ice Systems

Self Contained Ice Machine up to 109 kg

Item #:

Project:

Quantity:



## FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.



NU 220  
Full Cube 10 g  
W 22 x D 22 x H 22 mm



NU H 220  
Half Cube 6 g  
W 10,5 x D 22 x H 27 mm

## CONDENSING SYSTEM

Air cooled

## INTERNAL BIN CAPACITY

37 kg

## REFRIGERANT GAS

R404A

## OPERATING REQUIREMENTS

## VOLTAGE V/Hz/ph

230/50/1

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	35°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Certifications:



**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice  
Apple store  
Google play  
Windows store

DOWNLOAD

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Self Contained Ice Machine up to 109 kg

18 January 2018

Self Contained Ice Machine up to 109 kg

# NU 220







Self Contained Ice Machine up to 109 kg

Item #:

Project:

Quantity:

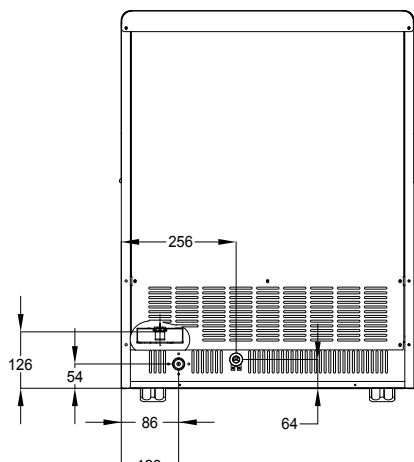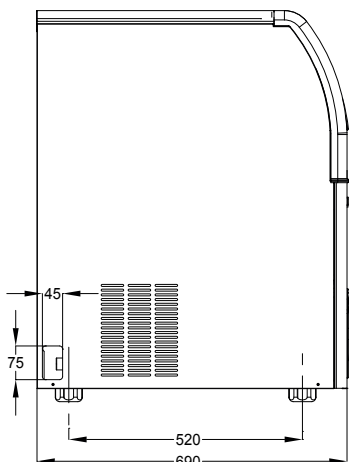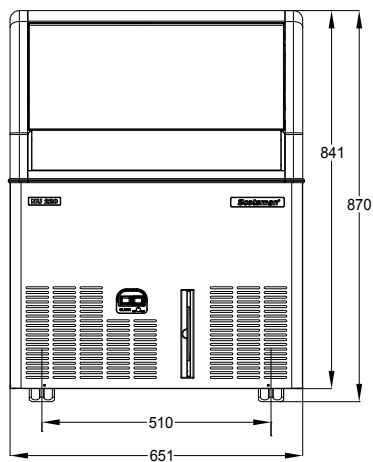

UNIT OF MEASUREMENT: mm

UNIT DATA					Compressor		Circuit wires		Max. fuse size		
			Version	Voltage	Btu/h	W	No.	Ømm²	A		
			Size (W x D x H)	650 x 690 x 870 mm	NU 220 AS	230/50/1	4436	1300	3	1.5	10
			Net weight	61 kg	NU H 220 AS	230/50/1	4436	1300	3	1.5	10
SHIPPING DATA											
Carton (W x D x H)	720 x 770 x 1020 mm										
Weight	73 kg										
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power		
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W		
NU 220 AS	Air	230/50/1	109	100	70	19.8	15.6	5.0	600		
NU H 220 AS	Air	230/50/1	109	100	70	19.8	15.6	5.0	600		

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions